

PRIXMA PRO I




PRODUCT DESCRIPTION

- High power Soft lighting.
- CRI > 95.
- Adjustable Color temperature 3200K° to 5600K°.
- Available models only 5600K° or 3200K° for more lighting power.
- Manual or Pole Operation Version
- Full Flicker Free.
- Cooling without fan, no noise.
- Only 80w consumption for 53-37 and 160w for 53-38.

SUPPLIED WITH

- Battery holder.
- V Battery and charger.
- C clamp.
- Safety cable.

OPTIONAL ACCESORIES

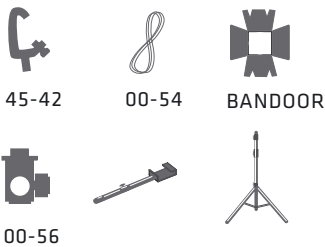

AC/DC Powered
110V - 240V - 14,4V



Pole Operation Version

SOFT PANEL LED LIGHTING

MODEL 53-37 PRO I LED PANEL 1x1x



Beam Angle
55°



DMX



Manual Control



3200K° or 5600K°



Inside




W-DMX
Optional



PHOTOMETRIC DATA

PRIXMA PRO I - MODEL 53-37 5600K°

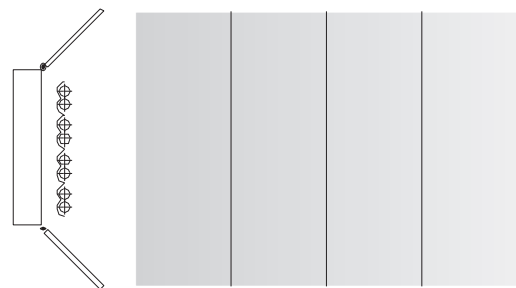

Distance (mts)	1.00	3.00	4.00
Luminance (lux)	1980	360	180

DIMENSIONS

PRIXMA PRO I - MODEL 53-37

- L** 144mm (5.66")
- W** 512mm (20.15")
- H** 354mm (13.93")

