

SOFT SERIES




PRIXMA FLEX BI-COLOUR

PRODUCT DESCRIPTION

- Offering 3 versions: Bicolor 3200K° - 5600K°, Single color Daylight 5600K° or Tungsten 3200K°.
- High CRI ≥ 95.
- BiColor 3200K° - 5600K° thru DMX and Manual control.
- DMX and Manual Dimming control.
- AC auto 110-230VAC.
- DC with V-Mount batteries (accessory).
- Supplied with accessory holder for using Led Diffusion filters.

OPTIONAL ACCESORIES



SUPPLIED WITH

- Porta filter
- 2 m power supply cable.

PRIXMA FLEX BI-COLOUR MODEL 53-42



Beam Angle
15° - 50°



DMX



Manual Control



5600K° or 3200K°



Inside




W-DMX
Optional



POLE OPERATED VERSION

PRIXMA FLEX BI-COLOUR - MODEL 53-42

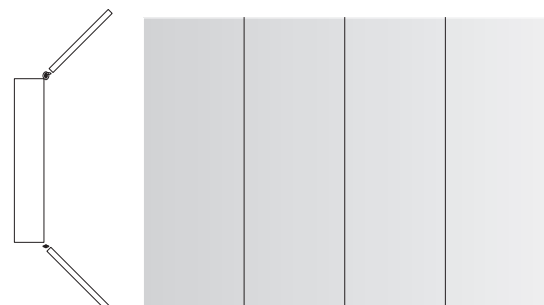

Distance (mts)	1.00	2.00	3.00
Lux 5600K°	1830	1190	900
Lux 3200K°	1872	1230	870
ø Beam	ø 1m	ø 2m	ø 3.5m

PRIXMA FLEX BI-COLOUR - MODEL 53-42

L	107mm (4.21")
W	422mm (16.61")
H	238mm (9.37")

