

SOFT SERIES



PRIXMA FLEX BI-COLOUR

PRODUCT DESCRIPTION

- Offering 3 versions: Bicolor 3200K° - 5600K°, Single color Daylight 5600K° or Tungsten 3200K°.
- High CRI ≥ 95.
- BiColor 3200K° - 5600K° thru DMX and Manual control.
- DMX and Manual Dimming control.
- AC auto 110-230VAC.
- DC with V-Mount batteries (accessory).
- Supplied with accessory holder for using Led Diffusion filters.

PRIXMA FLEX BI-COLOUR MODEL 53-43



Beam Angle
15° - 50°



DMX



Manual Control



5600K° or 3200K°



Inside



W-DMX
Optional

OPTIONAL ACCESORIES



45-42



00-54



Porta filter



00-56



SUPPLIED WITH

- Porta filter
- 2 m power supply cable.




PRIXMA FLEX BI-COLOUR - MODEL 53-43

PRIXMA FLEX BI-COLOUR - MODEL 53-43



POLE OPERATED VERSION

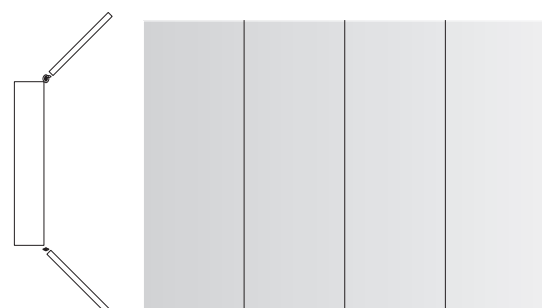

Distance (mts)	1.00	2.00	3.00
Lux 5600K°	2745	1785	1350
Lux 3200K°	2808	1845	1305
ø Beam	ø 1.5m	ø 3m	ø 5.25m

L	107mm (4.21")
W	844mm (33.22")
H	238mm (9.37")

