

ARCHITECTURAL LIGHTING



PRODUCT DESCRIPTION

- Zoom lens system.
- High efficient led 50W CRI ≥ 92.
- Full manual dimming.
- Colour temperature: 5600K° or 3200K°.
- Ideal for using at a distance 1.5 - 4 mts.
- 4-way adjustable framing shutters.
- For using with custom made and standard gobos.
- Power consumption only 50W.

MICRO ELLIPSOIDAL LED 50W VARIABLE FOCUS & DIMMING



Beam Angle
33° - 12°



Inside



Manual Control



5600K° or 3200K°

OPTIONAL ACCESORIES



00-56




MODEL 53-68



PHOTOMETRIC DATA

Micro Ellipsoidal Led 50W Model 53-68

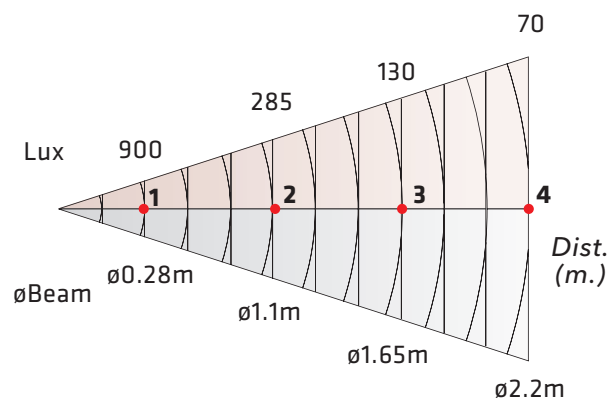

DIMENSIONS

Micro Ellipsoidal Led 50W Model 53-68

- L** 274mm (10.8")
- W** 139mm (5.47")
- H** 220mm (8.66")
- Weight** 1.5kg (3.3 Lbs)
- Dimensions** 280x230x150mm (11.02"x9.05"x5.9")

