

FRESNELS LED




SPL-150/MO SPL-150/PO

FRESNEL LED STUDIO 150W

- High power led 150w CRI ≥ 95
- Power consumption: 150w
- Power requirements 90V-240V 50/60Hz
- Control method: DMX or local (manual) dimming 0 to 100%
- Colour temperature 5600K° or 3200K°
- Full Flicker free
- Fresnel lens Ø 150mm
- Powercom for power daisy chain
- MO manual operation version - PO pole operation version

ACCESSORIES




Barndoor 8-leaf



Colour conversion & Diffusion filter frame

DIMENSIONS




L 380mm (14.96")
 W 306mm (12.04")
 H 542mm (21.33")
 9,500 kg

PHOTOMETRIC DATA

Spot					
Distance	4 mts	5 mts	6 mts	7 mts	8 mts
Center beam	5536 lux	3667 lux	2430 lux	1779 lux	1351 lux
Light beam Ø	1,30 mts	1,70 mts	1,90 mts	2,10 mts	2,50 mts
CCT K°	5780	5780	5780	5780	5780
CRI	95	95	95	95	95

Center beam	7134 lux	4490 lux	2970 lux	2230 lux	1660 lux
Light beam Ø	1,30 mts	1,70 mts	1,90 mts	2,10 mts	2,50 mts
CCT K°	3150	3150	3150	3150	3150
CRI	96	96	96	96	96

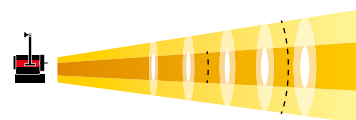

Flood					
Distance	4 mts	5 mts	6 mts	7 mts	8 mts
Center beam	2225 lux	1450 lux	990 lux	750 lux	570 lux
Light beam Ø	2,60 mts	3,40 mts	3,90 mts	4,40 mts	5,00 mts
CCT K°	5980	5980	5980	5980	5980
CRI	95	95	95	95	95

Center beam	2725 lux	2225 lux	1210 lux	900 lux	700 lux
Light beam Ø	2,60 mts	3,40 mts	3,90 mts	4,40 mts	5,00 mts
CCT K°	3225	3225	3225	3225	3225
CRI	96	96	96	96	96

KIT CONTENTS

- Lamphead
- Barndoor 8-leaf
- Colour frame
- Safety grid
- 2 m power supply cable